A	D			

TECHNICAL REPORT ARCCB-TR-97019

RESIDUAL STRESS IN SWAGE AUTOFRETTAGED CYLINDERS WITH AXIAL SEMI-CIRCULAR MID-WALL COOLING CHANNELS

S. L. LEE J. NEESE E. HYLAND

DIFFE QUALITY INSPECTED 2

SEPTEMBER 1997



US ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER

CLOSE COMBAT ARMAMENTS CENTER BENÉT LABORATORIES WATERVLIET, N.Y. 12189-4050



APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

19971001 036

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The use of trade name(s) and/or manufacturer(s) does not constitute an official indorsement or approval.

DESTRUCTION NOTICE

For classified documents, follow the procedures in DoD 5200.22-M, Industrial Security Manual, Section II-19 or DoD 5200.1-R, Information Security Program Regulation, Chapter IX.

For unclassified, limited documents, destroy by any method that will prevent disclosure of contents or reconstruction of the document.

For unclassified, unlimited documents, destroy when the report is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

Davis Highway, Suite 1204, Arlington, VK 2222-322 Block Control of the Control of				
	September 1997	Final		WINARCOS
4. TITLE AND SUBTITLE RESIDUAL STRESS IN SWAGE AU WITH AXIAL SEMI-CIRCULAR MII	TOFRETTAGED CYLINDERS D-WALL COOLING CHANNELS	S	5. FUNDING I AMCMS	No. 6111.01.91A1
6. AUTHOR(S)			l	
S.L. Lee, J. Neese, and E. Hyland				
7. PERFORMING ORGANIZATION NAM	E(S) AND ADDRESS(ES)		8. PERFORMI REPORT N	NG ORGANIZATION
U.S. Army ARDEC				TR-97019
Benet Laboratories, AMSTA-AR-CCB	-0	!	ARCCD	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Watervliet, NY 12189-4050			,	
9. SPONSORING/MONITORING AGENC	Y NAME(S) AND ADDRESS(ES)		10. SPONSOR	ING / MONITORING
U.S. Army ARDEC			AGENCY	REPORT NUMBER
Close Combat Armaments Center			Ī	
Picatinny Arsenal, NJ 07806-5000				
11. SUPPLEMENTARY NOTES Presented at the Society of Experimer Published in proceedings of the confe	ntal Mechanics Spring Conference rence.	, Bellevue, WA, 2-4 Ju	ne 1997.	
12a. DISTRIBUTION/AVAILABILITY ST	ATCMENT		12b. DISTRIE	BUTION CODE
Approved for public release; distribut				
13. ABSTRACT (Maximum 200 words)			<u></u>	
ABAQUS finite element modeling and cylinders with semi-circular mid-wal distributions, except near the bore and observations have been attributed to	ll cooling channels. The experiment of the channel roots, where significant is the channel roots, where significant is the channel roots.	ental results verified in cantly reduced compress	iosi leatures of	WDWOOD-blemeng areas
			<u> </u>	5. NUMBER OF PAGES
14. SUBJECT TERMS Autofrettage, Compound Cylinders,		7		
Residual Stress, Reverse Yielding, I	Bauschinger Effect			6. PRICE CODE
17. SECURITY CLASSIFICATION 1	8. SECURITY CLASSIFICATION	19. SECURITY CLASS	IFICATION 2	0. LIMITATION OF ABSTRACT
OF SEDORT	OF THIS PAGE UNCLASSIFIED	OF ABSTRACT UNCLASSIFIED		UL

TABLE OF CONTENTS

	Page
INTR	ODUCTION1
OBSE	ERVATIONS1
CON	CLUSIONS2
REFE	ERENCES3
	LIST OF ILLUSTRATIONS
1.	Cross section of cylinder showing OD, OM, and an exaggerated cooling channel 4
2.	X-ray residual stress distribution along OD and OM from ID to OD
3.	Top four curves representing ABAQUS residual stress plus pressure; bottom four curves representing residual stress at 20, 40, 60, and 80 percent, bore to channel root residual stress distribution

INTRODUCTION

Residual stresses have been induced by the swage autofrettage process in A723 steel cylinders of 155-mm diameter containing axial mid-wall cooling channels. These cylinders consist of liner cylinders with semi-circular channels that were shrunk fit into steel jackets. Then the swage autofrettage operation was performed. The introduction of the axial channels significantly modifies the magnitude and location of the stress concentrations and expected failure sites.

Fatigue life calculation, stress concentration, and stress intensity of similar cylinders have been reported (ref 1). In this work, experimental X-ray diffraction residual stress analysis was performed and compared with Tresca's model of a mono-block solid cylinder under 40, 50, and 60 percent overstrain, and with predictions from an ABAQUS elastic-plastic deformation finite element model. Because of the presence of high-gradient components in the stress distribution, X-ray beam spread function and the effect of resolution were investigated.

OBSERVATIONS

Figure 1 shows half of the cross section of the cylinder, where OD and OM are radii extending from the cylinder axis to the outside diameter. OD crosses the cylinder wall at A, root of cooling channel at B, flat side of cooling channel at C, and outside diameter at D. OM represents a mid-channel direction.

Figure 2 shows the radial distribution of hoop residual stresses along OD and OM. Residual stress at points A, B, C, and D were also determined for 180° of the cylinder arc to show the uniformity of induced stresses. Our experimental results are in good general agreement with Tresca's classical deformation model of a solid cylinder under internal pressure. Deviations were observed near the bore, which are generally explained by the Bauschinger effect (ref 2). Modifications to the stress distribution along OD and OM due to the existence of the cooling channels are obvious.

A two-dimensional ABAQUS finite element deformation model was used to study the elastic and plastic deformation of the cylinder. Figure 3 shows ABAQUS-predicted residual stress distribution from the bore to the channel root (ref 1). A comparison of ABAQUS predictions and experimental stress distribution yields good general agreement, with important deviations near the bore and the channel roots. Reduced compressive stresses were observed near the bore. While experimental measurements verified the tensile stresses turning into compressive stresses near the channel roots, the compressive stresses were not as high as predicted.

CONCLUSIONS

Conclusions from the present investigation include:

- Residual stress distribution in a cylinder with axial channels is comparable to a 54 percent partially swage autofrettaged solid cylinder.
- The Bauschinger effect plays an important role both near the bore and the channel roots in reducing compressive residual stresses.
- Based on this work, channel roots and the bore are critical sites in the design and safe operation of the component, with the channel root being most critical.
- Using current measured residual stress levels, the fatigue life estimates give a lifetime at the channel roots of only 60 percent of life at the bore. During operation of fatigue testing to failure, cracks were first observed near the channel roots, as predicted from our investigation.

REFERENCES

- 1. Parker, A.P., Endersby, S., Bond, T., Underwood, J.H., Lee, S.L., and Higgins, J., "Stress Concentration, Stress Intensity, and Fatigue Lifetime Calculations in Autofrettaged Tubes Containing Axial Perforations Within the Wall," *ASME Pressure Vessels and Piping Conference*, Vol. 335, 1996, pp. 235-247.
- 2. Lee, S.L., Olmstead, V., O'Hara, G., and Capsimalis, G., "Characterization of Residual Stresses in an Eccentric Swage Autofrettaged Thick-Walled Steel Cylinder," *Proceedings of ASM International Conference on the Practical Application of Residual Stress Technology*, Plenum Press, 1991, pp. 123-129.

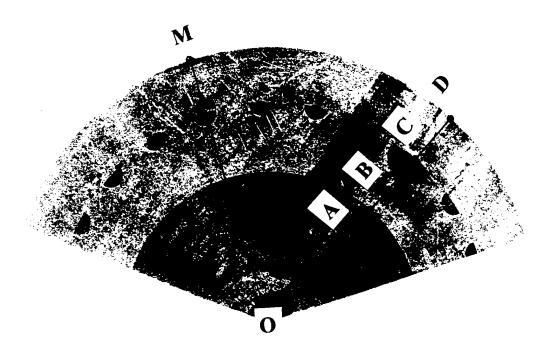


Figure 1. Cross section of cylinder showing OD, OM, and an exaggerated cooling channel. Point B is at the channel root.

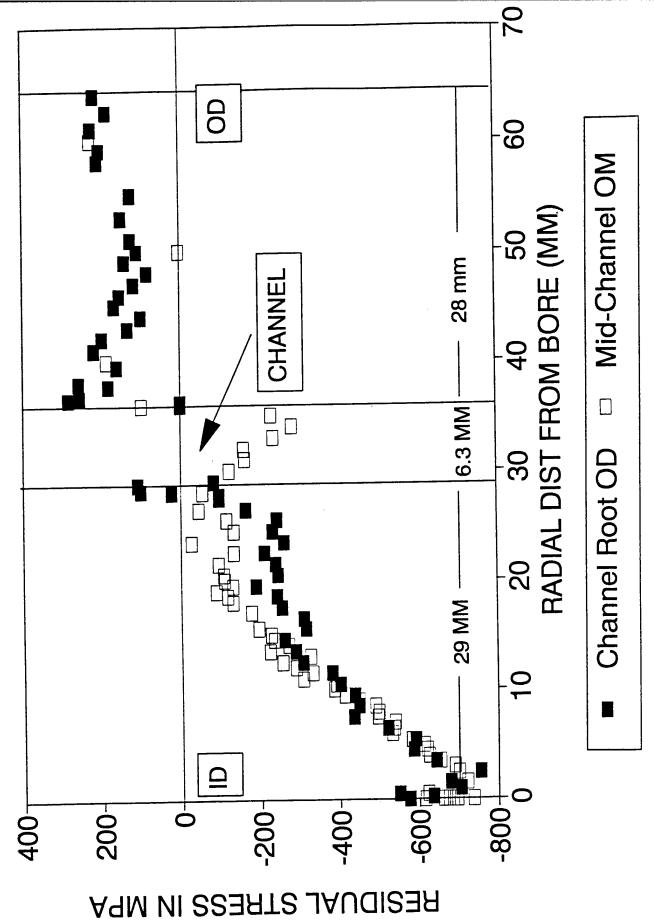


Figure 2. X-ray residual stress distribution along OD and OM from ID to OD.

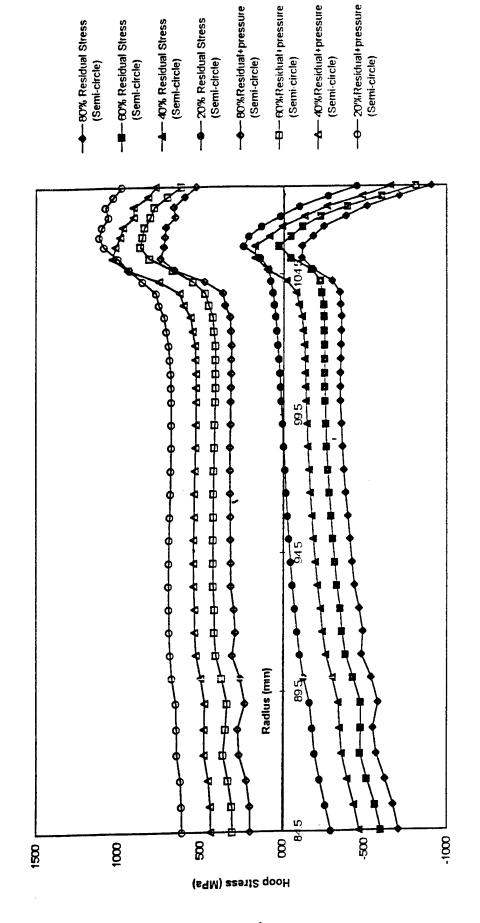


Figure 3. Top four curves representing ABAQUS residual stress plus pressure; bottom four curves representing residual stress at 20, 40, 60, and 80 percent, bore to channel root residual stress distribution.

TECHNICAL REPORT INTERNAL DISTRIBUTION LIST

	NO. OF COPIES
CHIEF, DEVELOPMENT ENGINEERING DIVISION	
ATTN: AMSTA-AR-CCB-DA	1
-DB	1
-DC	1
-DD	1
-DE	1
CHIEF, ENGINEERING DIVISION	
ATTN: AMSTA-AR-CCB-E	1
-EA	1
-EB	1
-EC	1
CHIEF, TECHNOLOGY DIVISION	
ATTN: AMSTA-AR-CCB-T	2
-TA	1
-TB	1
-TC	1
TECHNICAL LIBRARY	
ATTN: AMSTA-AR-CCB-O	5
TECHNICAL PUBLICATIONS & EDITING SECTION	
ATTN: AMSTA-AR-CCB-O	3
OPERATIONS DIRECTORATE	
ATTN: SIOWV-ODP-P	1
DIRECTOR, PROCUREMENT & CONTRACTING DIRECTORATE	
ATTN: SIOWV-PP	1
DIRECTOR, PRODUCT ASSURANCE & TEST DIRECTORATE	
ATTN: SIOWV-QA	1

NOTE: PLEASE NOTIFY DIRECTOR, BENÉT LABORATORIES, ATTN: AMSTA-AR-CCB-O OF ADDRESS CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST

	NO. OF COPIES	NO. (COPI	
ASST SEC OF THE ARMY RESEARCH AND DEVELOPMENT ATTN: DEPT FOR SCI AND TECH THE PENTAGON WASHINGTON, D.C. 20310-0103	1	COMMANDER ROCK ISLAND ARSENAL ATTN: SMCRI-SEM ROCK ISLAND, IL 61299-5001	1
DEFENSE TECHNICAL INFO CENTER ATTN: DTIC-OCP (ACQUISITIONS) 8725 JOHN J. KINGMAN ROAD STE 0944	2	COMMANDER U.S. ARMY TANK-AUTMV R&D COMMAND ATTN: AMSTA-DDL (TECH LIBRARY) WARREN, MI 48397-5000	1
FT. BELVOIR, VA 22060-6218 COMMANDER		COMMANDER U.S. MILITARY ACADEMY ATTN: DEPARTMENT OF MECHANICS	1
U.S. ARMY ARDEC ATTN: AMSTA-AR-AEE, BLDG. 3022 AMSTA-AR-AES, BLDG. 321 AMSTA-AR-AET-O, BLDG. 183	1 1 1	WEST POINT, NY 10966-1792 U.S. ARMY MISSILE COMMAND REDSTONE SCIENTIFIC INFO CENTER	2
AMSTA-AR-FSA, BLDG. 354 AMSTA-AR-FSM-E AMSTA-AR-FSS-D, BLDG. 94	1 1 1	ATTN: AMSMI-RD-CS-R/DOCUMENTS BLDG. 4484 REDSTONE ARSENAL, AL 35898-5241	
AMSTA-AR-IMC, BLDG. 59 PICATINNY ARSENAL, NJ 07806-5000 DIRECTOR	2	COMMANDER U.S. ARMY FOREIGN SCI & TECH CENTER	
U.S. ARMY RESEARCH LABORATORY ATTN: AMSRL-DD-T, BLDG. 305 ABERDEEN PROVING GROUND, MD	1	ATTN: DRXST-SD 220 7TH STREET, N.E. CHARLOTTESVILLE, VA 22901	1
21005-5066 DIRECTOR U.S. ARMY RESEARCH LABORATORY		COMMANDER U.S. ARMY LABCOM, ISA ATTN: SLCIS-IM-TL 2800 POWER MILL ROAD	1
ATTN: AMSRL-WT-PD (DR. B. BURNS) ABERDEEN PROVING GROUND, MD 21005-5066	1	ADELPHI, MD 20783-1145	

NOTE: PLEASE NOTIFY COMMANDER, ARMAMENT RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER, BENÉT LABORATORIES, CCAC, U.S. ARMY TANK-AUTOMOTIVE AND ARMAMENTS COMMAND, AMSTA-AR-CCB-O, WATERVLIET, NY 12189-4050 OF ADDRESS CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST (CONT'D)

NO. C COPII	-		NO. OF COPIES
COMMANDER U.S. ARMY RESEARCH OFFICE ATTN: CHIEF, IPO P.O. BOX 12211 RESEARCH TRIANGLE PARK, NC 27709-2211	1	WRIGHT LABORATORY ARMAMENT DIRECTORATE ATTN: WL/MNM EGLIN AFB, FL 32542-6810	1
DIRECTOR U.S. NAVAL RESEARCH LABORATORY ATTN: MATERIALS SCI & TECH DIV WASHINGTON, D.C. 20375	1	WRIGHT LABORATORY ARMAMENT DIRECTORATE ATTN: WL/MNMF EGLIN AFB, FL 32542-6810	1

NOTE: PLEASE NOTIFY COMMANDER, ARMAMENT RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER, BENÉT LABORATORIES, CCAC, U.S. ARMY TANK-AUTOMOTIVE AND ARMAMENTS COMMAND, AMSTA-AR-CCB-O, WATERVLIET, NY 12189-4050 OF ADDRESS CHANGES.

DEPARTMENT OF THE ARMY
ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER
BENÉT LABORATORIES, CCAC
US ARMY TANK-AUTOMOTIVE AND ARMAMENTS COMMAND
WATERVLIET, N.Y. 12189-4050

OFFICIAL BUSINESS AMSTA-AR-CCB-O TECHNICAL LIBRARY